



## Description


OXO Pixyline 150 is an IP65 dot-to-dot linear LED fixture. With its advanced features it is the ideal lighting solution for indoor exhibitions or outdoor events.

## Features

- 14 x 10W
- RGB + WW
- Aperture 20°x50° (asymmetrical)
- White macros (2700K to 8000K)
- Color Macros (LEE FILTER calibration)
- IP65
- Stainless steel housing
- OLED display with 4-digit buttons
- DMX512, RDM, IR
- DMX XLR5 (IN/OUT)
- PowerCON True1 (IN/OUT)
- Adjustable and asymmetrical feet for ground positioning




## Drawings

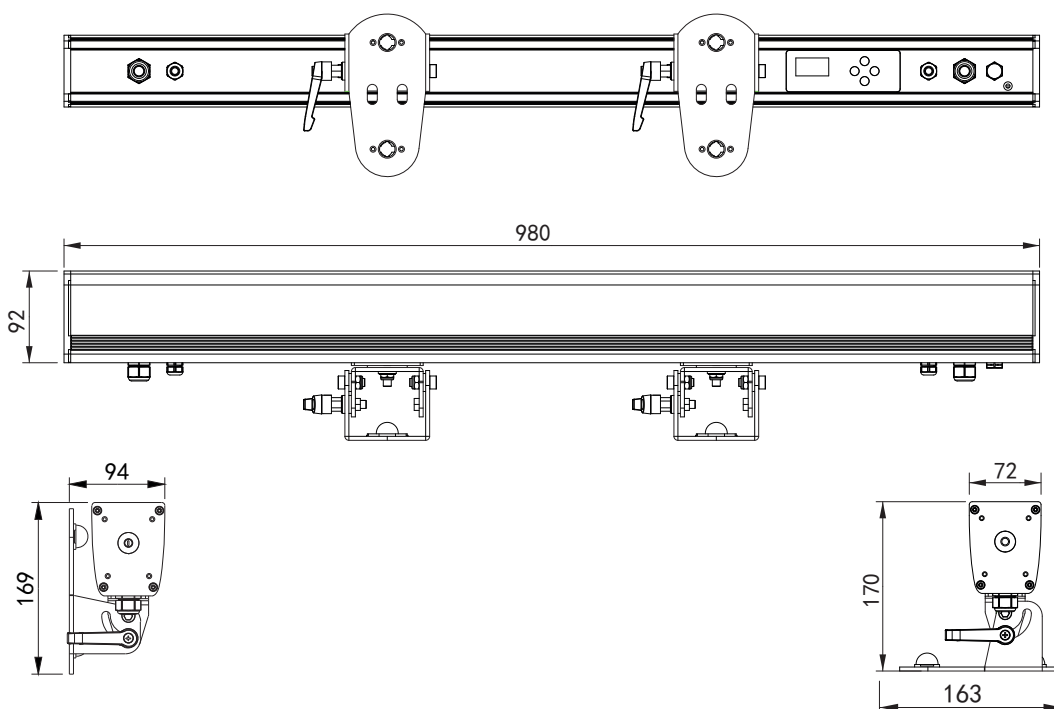

## Specifications

<b>Product type</b>	LINEAR LED FIXTURE, WALL WASHER
<b>Order code</b>	OPIXILINE150N
<b>Colour spectrum</b>	RGB + Warm White
<b>Number of LEDs</b>	14
<b>LED type</b>	Multichip 10W
<b>Beam angle</b>	20° X 50°
<b>Optional filters</b>	NO
<b>Zoom</b>	NO
<b>CCT control</b>	YES
<b>Luminous flux (lm)</b>	NC
<b>CRI</b>	NC
<b>DMX mode</b>	4
<b>DMX channels</b>	5/10/56/62
<b>Control</b>	DMX512, RDM, IR
<b>Display</b>	OLED
<b>Operating voltage</b>	100-240 VAC, 50-60HZ
<b>Power consumption</b>	120W @max
<b>DMX Connectors</b>	XLR5 IN/OUT
<b>Type</b>	Outdoor
<b>Protection class</b>	IP65
<b>Power supply connector</b>	PowerCON TRUE1 IN/OUT
<b>Housing and colour</b>	Die cast aluminium, black
<b>Cooling</b>	Natural convection
<b>Weight</b>	8,60KG
<b>Dimensions l x w x d (mm)</b>	980 x 163 x 170
<b>Warranty</b>	2 years

## Overview

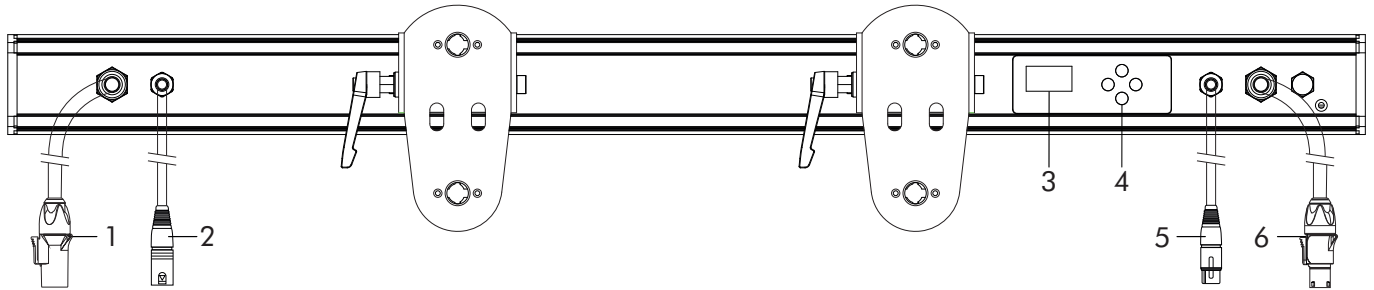

**1. Power supply IN (PowerCON TRUE1)**

**2. DMX IN (XLR5)**

**3. Display**

**4. Touch button «Mode / Up / Down / Enter»**

**5. DMX OUT (XLR5)**

**6. Power supply OUT (PowerCON TRUE1)**

## Accessories



Flight-case (x8 pcs)

## More about



## User manual & DMX Chart

