




Description

OXO Pixyline 75 is an IP65 dot-to-dot linear LED fixture. With its advanced features it is the ideal lighting solution for indoor exhibitions or outdoor events with minimal spaces..

Features

- 7 x 10W
- RGB + WW
- Aperture 20°x50° (asymmetrical)
- White macros (2700K to 8000K)
- Color Macros (LEE FILTER calibration)
- IP65
- Stainless steel housing
- OLED screen with 4 control boutons
- DMX512, RDM, IR
- DMX XLR5 (IN/OUT)
- PowerCON True1 (IN/OUT)
- Adjustable and asymmetrical feet for ground positioning


Drawings

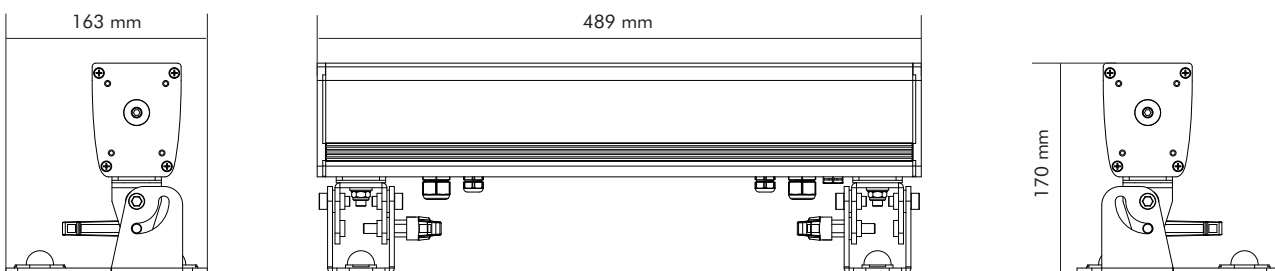

Specifications

Product type	LINEAR LED FIXTURE, WALL WASHER
Order code	OPIXILINE75N
Colour spectrum	RGB + Warm White
Number of LEDs	7
LED type	Multichip 10W
Beam angle	20° X 50°
Optional filters	NO
Zoom	NO
CCT control	YES
Luminous flux (lm)	NC
CRI	NC
DMX mode	4
DMX channels	5/10/56/62
Control	DMX512, RDM, IR
Display	OLED
Operating voltage	100-240 VAC, 50-60HZ
Power consumption	75W @max
DMX Connectors	XLR5 IN/OUT
Type	Outdoor
Protection class	IP65
Power supply connector	PowerCON TRUE1 IN/OUT
Housing and colour	Die cast aluminium, black
Cooling	Natural convection
Weight	4,10KG
Dimensions l x w x d (mm)	489 x 163 x 170
Warranty	2 years

Overview

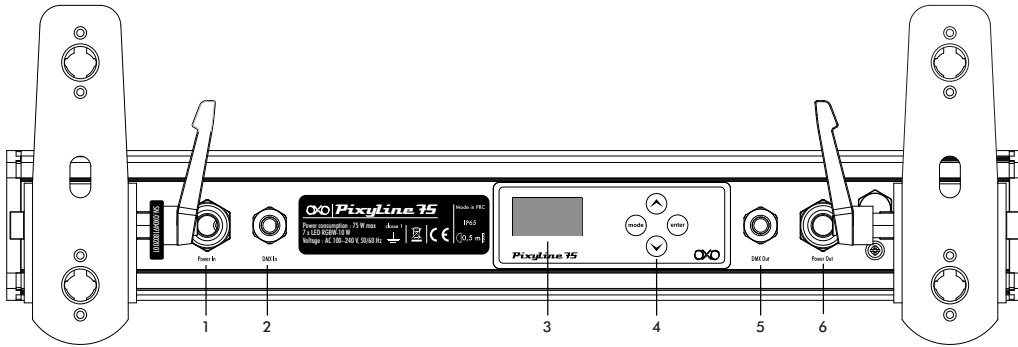

1. Power supply IN (PowerCON TRUE1)

2. DMX IN (XLR5)

3. Display

4. Touch button «Mode / Up / Down / Enter»

5. DMX OUT (XLR5)

6. Power supply OUT (PowerCON TRUE1)

Accessories



Flight-case (x8 pcs)

More about



User manual & DMX Chart

