



Description


Pendant 150 ARC is a versatile ambient & house light perfectly suitable as pendant lighting for halls, offices, theaters, desks, etc... Also declined in RGB+Lime

Features

- 1 x COB 150W
- Warm White @3000K
- 14250 lm
- CRI>98
- Aperture 25°
- 8/16 bits linear dimmer
- Suspended installation (removable mounting yoke)
- DMX Loss modes : On, Off or macros
- Custom RAL on request
- Die-cast aluminium
- Black finish
- DMX modes : 1, 2 or 4 channels
- DMX breakout cables
- Power supply IN breakout cables




Drawings

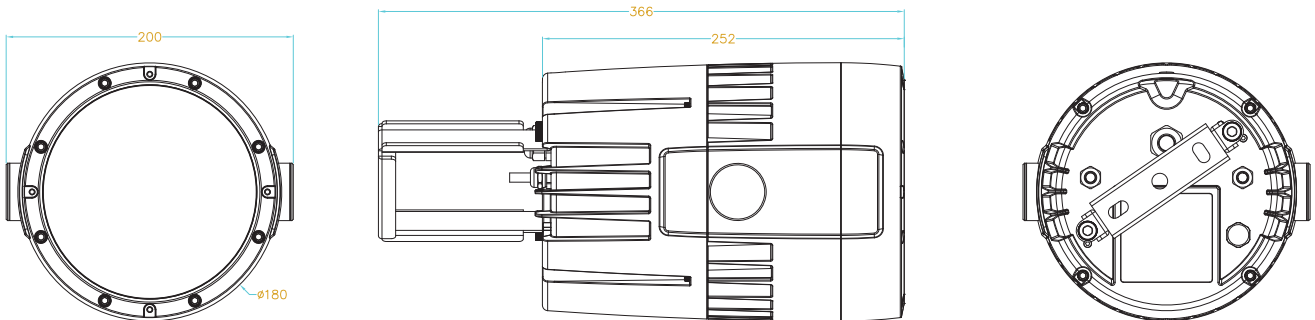

Specifications

Product type	ARCHITECTURAL, PENDANT LIGHT
Order code	OPENDANT150ARC
Colour spectrum	Warm White (@3000K)
Number of LEDs	1
LED type	COB 150W
Beam angle	25°
Optional filters	YES
Zoom	NO
CCT control	NO
Luminous flux (lm)	14250
CRI	>98
DMX mode	3
DMX channels	1/2/4
Control	DMX512, RDM
Display	LED
Operating consumption	100-240 VAC, 50-60 Hz
Power consumption	150 W @max
DMX Connectors	Breakout DMX XLR cables (IN/OUT)
Type	Indoor & Outdoor
Protection class	IP66
Power supply connector	Breakout power supply cable (IN) (L=150cm)
Housing and colour	Die cast aluminium, black
Cooling	Natural convection and cooling fan
Weight	5,20KG
Dimensions l x w (mm)	319 x 196
Warranty	5 years

Overview

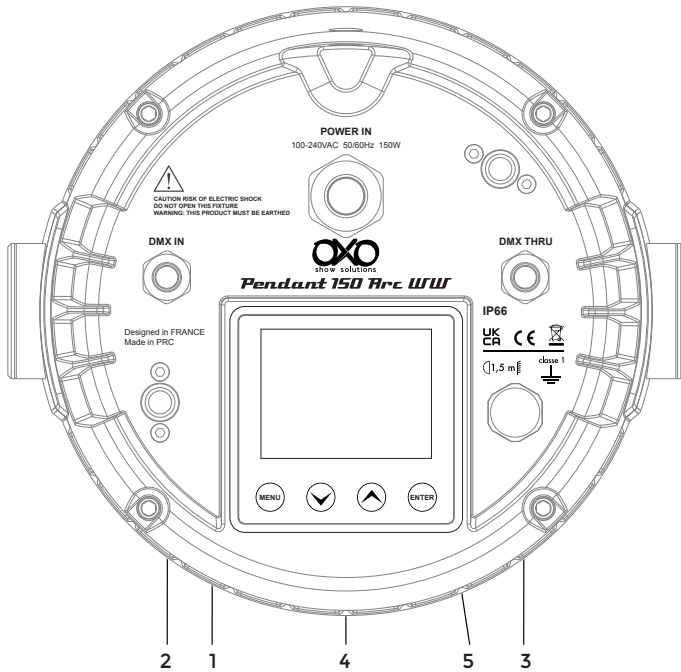

1. Power supply IN (wire length 1,5 m)

2. DMX IN (wire length 1,5 m)

3. DMX OUT (wire length 1,5 m)


4. Touch buttons "Mode / Down / Up / Enter"

5. Display

Accessories



Filter



Honey-comb



Snoot



Barndoor



Yoke

More about



User manual & DMX Chart

